

Items Supplied >

- 1 – FORMED LUGGAGE RACK
- 4 – M8 X 20mm BUTTONHEAD ALLEN BOLTS

Application(s) >


COBRA SISSY BAR APPLICATIONS

Instruction Manual >

02-3600 / 02-3601 / 02-3602

1. Remove the buttonhead allen bolts securing the sissy bar to the side mounting brackets, these bolts will not be used again.
2. Install the luggage rack between the side mounting brackets and sissy bar, refer to Figure 1.
3. Install supplied M8 x 20 mm Buttonhead allen bolts and torque to 20 ft-lbs or 28 N-m.

NOTE: THIS LUGGAGE RACK IS ONLY INTENDED TO FUNCTION WITH COBRA MANUFACTURED SISSY BAR APPLICATIONS.

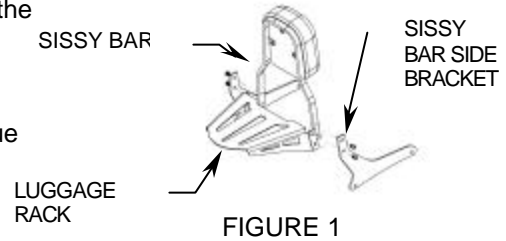

** Cobra recommends you always wear a helmet while riding. Please never operate your motorcycle while under the influence of alcohol and/or drugs. Enjoy the new look of your motorcycle and please ride safely.*

DOCUMENT NO. 0019REV. B

01/07

Anything's Possible™

Items Supplied >

- 1 – FORMED LUGGAGE RACK
- 4 – M8 X 20mm BUTTONHEAD ALLEN BOLTS

Application(s) >


COBRA SISSY BAR APPLICATIONS

Instruction Manual >

02-3600 / 02-3601 / 02-3602

1. Remove the buttonhead allen bolts securing the sissy bar to the side mounting brackets, these bolts will not be used again.
2. Install the luggage rack between the side mounting brackets and sissy bar, refer to Figure 1.
3. Install supplied M8 x 20 mm Buttonhead allen bolts and torque to 20 ft-lbs or 28 N-m.

NOTE: THIS LUGGAGE RACK IS ONLY INTENDED TO FUNCTION WITH COBRA MANUFACTURED SISSY BAR APPLICATIONS.

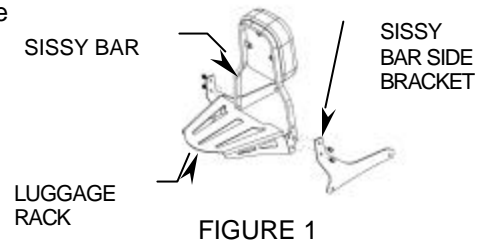

** Cobra recommends you always wear a helmet while riding. Please never operate your motorcycle while under the influence of alcohol and/or drugs. Enjoy the new look of your motorcycle and please ride safely.*

DOCUMENT NO. 0019REV. A

01/07

Anything's Possible™