

Items Supplied >

1 - FRONT MUFFLER ASSEMBLY

1 - REAR MUFFER ASSEMBLY

Application >

HARLEY:

FAT BOB 08-17 WIDE GLIDE 10-17

NOTE: DOES NOT FIT LOW RIDER S MODELS.

Instruction Manual >


6006B

Page 1 of 1

www.cobrausa.com

Read all instructions carefully and completely before installing your new slip-on mufflers

- 1. Remove the stock mufflers carefully. Save the mounting bolts and stock clamps.
- 2. Slide the stock clamps over the slip-on mufflers and position them as shown in Figure 1.
- 3. NOTE: THE MUFFLER WITH THE COBRA LOGO WILL ALWAYS BE THE REAR CYLINDER. Slide the mufflers onto the headpipes until the mounting holes align.
- 4. Fasten the mufflers using the stock mounting bolts in the same manner as stock but **do not tighten.** Verify that the gap, where the mufflers meet the stock heatshields, is similar to the gap the stock mufflers allotted.
- 5. Check all clearances and alignments then tighten the clamps. (NOTE: The muffler clamps should be flush with the end of the muffler when tightened. See Figure 2. If the muffler clamps are slid forward past the slots on the slip collar the clamps will not tighten the mufflers properly. Also, make sure the clamp spacer is not over the slots. The slots need to be covered by the clamp band so that it seals the slots properly. Rotate the clamp if necessary). Tighten the mounting bolts to factory specifications.
- 6. NOTE: The exhaust tips may be loosened and oriented to various positions for different visual effects.
- 7. IMPORTANT: Before starting your engine remove all fingerprints from all exhaust surfaces. To clean your black exhaust system use a liquid based soap detergent, such as dishwashing soap applied with a soft cloth and rinse with clean water. Note: Avoid abrasive cleaning methods such as granular or dry cleansers, simple green, scotch-brite or steel wool pads. Abrasives may breach the coating and shorten life.

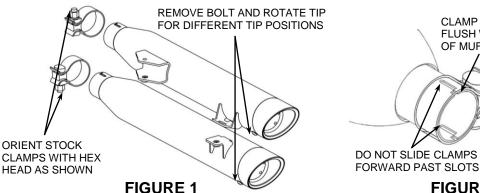

CLAMP SHOULD BE FLUSH WITH EDGE OF MUFFLER **CLAMP SPACER** DO NOT SLIDE CLAMPS

FIGURE 2

POSITION OF MUFFLERS AND MOUNTING BRACKETS SHOWN ABOVE MAY VARY FROM ACTUAL APPLICATION

REPLACEMENT E-GLASS PACKING AND OPTIONAL 13/4" QUIET CORES MAY BE PURCHASED THROUGH YOUR DEALER OR ONLINE AT WWW.COBRAUSA-HD.COM

IMPORTANT: To achieve optimum performance from your new mufflers it is suggested that you install a Cobra Fi2000® Digital Fuel Processor.

DISCLAIMER: NOT LEGAL FOR SALE OR USE IN CALIFORNIA ON ANY POLLUTION CONTROLLED MOTOR VEHICLES.